



WNS Lowery
 2221 SE 69th St
 Oklahoma City, OK 73149
 (405) 677-7222

Belled Nipples & Slip-On Couplings


WNS Lowery Belled Nipples and Slip-On Couplings allow for a quick and easy solution to connect the end of the pipe to the casing/tubing head. The pipe can be cut to the designed length and the Belled Nipple or Slip-On Coupling can be welded directly onto the pipe.

Features:

- Adapt clean end pipe to Male or Female Threads
- 2000 psi standard working pressure
- 5000 psi working pressure available in select sizes
- Standard Sizes available

Applications:

- Artificial Lift Wellheads

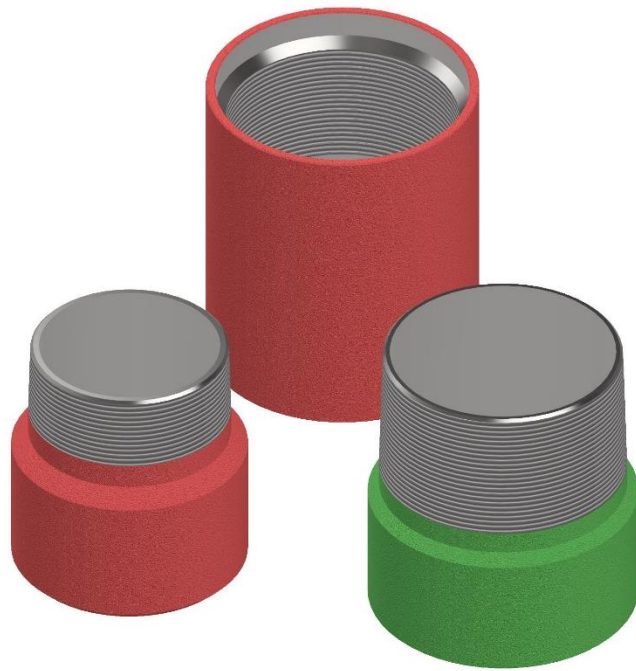

Specifications:

Belled Nipples

Connection Size	Height	Weight
4 1/2" SOW x 4 1/2"-8RD Male	6"	7 lb
5 1/2" SOW x 5 1/2"-8RD Male	6.75"	11 lb
7" SOW x 7"-8RD Male	7.75"	13 lb
8 5/8" SOW x 8 5/8"8RD Male	8"	28 lb
9 5/8" SOW x 9 5/8"8RD Male	8"	32 lb

*More sizes and combinations available upon request

Slip-On Couplings

Connection Size	Height	Weight
4 1/2" SOW x 4 1/2"-8RD Female	6"	7 lb
5 1/2" SOW x 5 1/2"-8RD Female	6.75"	11 lb
7" SOW x 7"-8RD Female	7.75"	13 lb
8 5/8" SOW x 8 5/8"8RD Female	8"	28 lb

*More sizes and combinations available upon request